


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 27 TOWNSHIP 16 RANGE 5
DATE: -7-13-97- 9-27-03
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-7-96

IN. S.P.C. E ZONE, NAD 83
NAME: 16052704
N: 505859.6780(m)
E: 73882.3400(m)

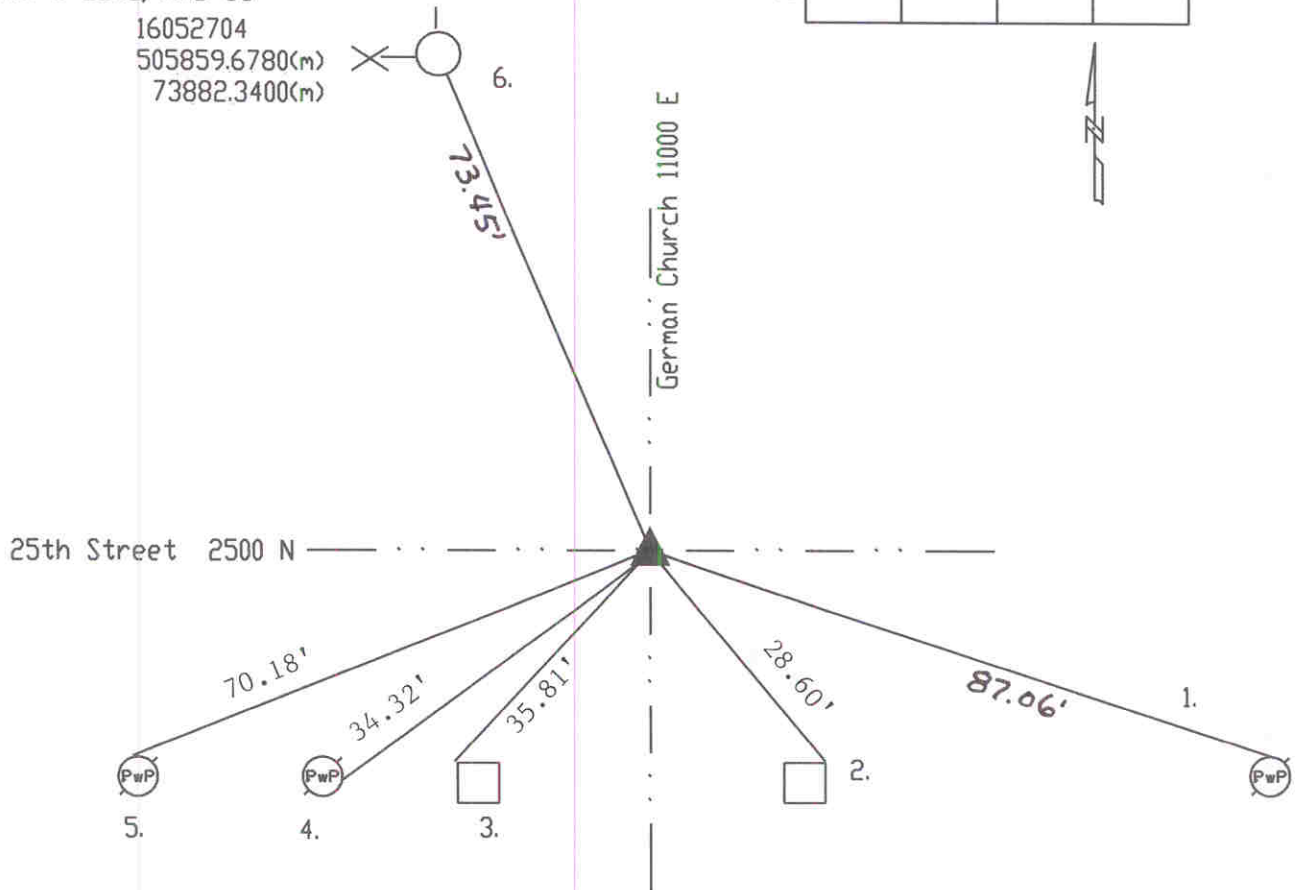

Original post set 1820 by Hendricks with witnesses: 7" ash N 59 E 11 links, 5" sugar S 30 W 5 links per Marion County Atlas pg. 15. Hosbrook called no stone but witnesses: 24" beech S 47 1/2 W 24 links, 20" hickory N 23 E 44 links per Warren Township Legal Survey Book pg. 12. Monroe 10-6-53 called stone. MCSO 3-15-66 called same. Fortner 3-21-75 called brass plug in steel box. Wilcoxon 7-15-88 called PK nail over brass plug. Wilcoxon 10-7-96 called same. Excavated by Wilcoxon 7-1-97 PK fd 3" dn, brass plug fd 6" dn. Harrison set.

HC652704

| REF. | DISTANCE | DESCRIPTION |
|------|----------|----------------------------------|
| 1. | 87.06' | PK N PwP#110-481A 60"up |
| 2. | 28.60' | NE grate inlet |
| 3. | 35.81' | NW grate inlet |
| 4. | 34.32' | PK w/shiner SE PwP#88-481DA 8"up |
| 5. | 70.18' | Rd NW PwP#37-481DA 60"up |
| 6. | 73.45' | PK top fence post |
| | | |
| | | |
| | | |
| | | |